



EPSON AcuLaser  
M2010D Series

**EPSON**  
EXCEED YOUR VISION

A 4 M O N O L A S E R P R I N T E R



28 PPM  
Built in Duplex  
A4 Laser Printer




Offer  
Comprehensive  
A4 Monochrome  
Printing Solution  
for SMEs and  
CORPORATE



AcuLaser™ M2010D

**EPSON AcuLaser™ M2010D Series**

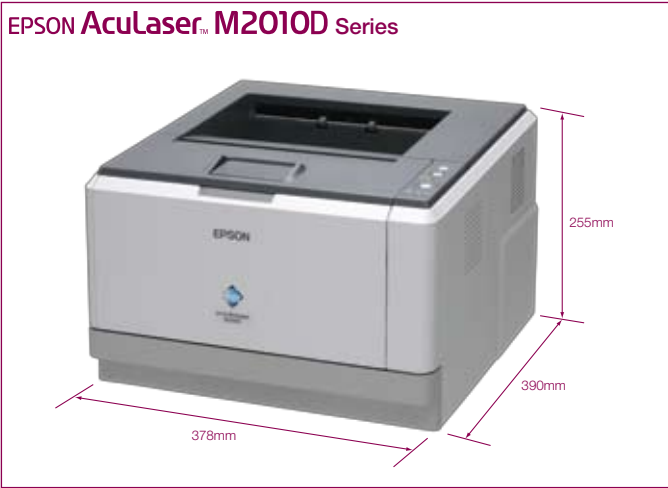

**PRINTER TYPE**

Category	: A4 Monochrome Laser Printer
Printing Technology	: Laser Single Pass
Resolution	: 1200dpi
Print Speed	: 28 ppm (simplex) / 14 ppm (duplex)
First Page Out Time	: 6 sec*2*3
Warm Up Time	: 17 sec or less (From power on)*4 14 sec or less (From sleep mode)*4
Processor	: 300 MHz

**PAPER HANDLING**

Max. Monthly Print Volume	: 20,000 pages
Paper Input Capacity (Std./Max.)	: 300 / 800 pages
Paper Output Capacity (Std./Max.)	: 250 pages (Face Down)
Duplex Printing	: Built in

**Standard**

**Multi Purpose Tray**

Capacity	50 pages
Paper Type / Size	A4, A5, B5, LT, HLT, LGL, GLT, GLG, EXE, F4, C5, C6, DL, Com10, Monarc, IB5
Width	70.0 - 215.9mm
Length	148.0 - 356.0 mm
Paper Weight	60-220 g/m <sup>2</sup>

**Standard Paper Cassette**

Capacity	250 pages
Paper Type / Size	A4, A5, B5, LT, HLT, LGL, GLT, GLG, EXE, F4
Paper Weight	60-120 g/m <sup>2</sup>

**DUPLEX UNIT**

Paper Type / Size	A4, LT
Paper Weight	60-105 g/m <sup>2</sup>

**Option**

**250-Sheet Paper Cassette Unit**

Capacity	250 pages
Paper Type / Size	A4, A5, B5, LT, LGL, GLT, GLG, EXE, F4
Paper Weight	60-120 g/m <sup>2</sup>

**INTERFACES**

High Speed USB 2.0
IEEE 1284 Parallel Interface (AcuLaser M2010D)
10/100 Base Tx Ethernet Interface (AcuLaser M2010DN)

**MEMORY**

AcuLaser M2010D	: 32MB (Standard) / 288MB (Maximum)
AcuLaser M2010DN	: 64MB (Standard) / 320MB (Maximum)

**POWER REQUIREMENTS**

Power Supply	AC 220-240V (50Hz)
Power Consumption	Operation Ave. 465 Wh : Max. 840 Wh
	Standby mode Ave. 7 Wh
	Sleep mode Ave. 3 Wh

**ENVIRONMENTAL CONDITIONS (OPERATING)**

Temperature	: 10-32.5°C
Humidity	: 15-80%RH
Sound Pressure	: Ave. 30 dB (Standby); Ave. 53 dB (Operating)

**DIMENSIONS AND WEIGHT**

Width x Depth x Height	: 378 x 390 x 255 mm
Weight	: 11.5kg (exclude consumables)

**PRINTER DRIVER/UTILITY**

Printer Driver for	: Microsoft® Windows® 2000 / XP / Server2003 / Vista, and Mac™ OS X
EPSON Status Monitor for PostScript® Printer Driver for	: Microsoft® Windows® 2000 / XP / Server2003 / Vista, and Mac™ OS X
EPSON Screen Font for	: Microsoft® Windows® 2000 / XP / Server2003 / Vista
EPSON BarCode Fonts for	: Microsoft® Windows® 2000 / XP / Server2003 / Vista
EpsonNet Print for	: Microsoft® Windows® 2000 / XP / Server2003 / Vista
EpsonNet Config for	: Microsoft® Windows® 2000 / XP / Server2003 / Vista, and Mac™ OS X
EpsonNet EasyInstall for	: Microsoft® Windows® 2000 / XP / Server2003 / Vista, and Mac™ OS X
EpsonNet SetupManager	: Microsoft® Windows® 2000 / XP / Server2003 / Vista
EPSON Web-To-Page for	: Microsoft® Windows® 2000/XP
EpsonNet NDPS Gateway for	: Microsoft® Windows® 2000 / XP
User guides	: Microsoft® Windows® 2000 / XP / Server2003 / Vista, and Mac™ OS X

**PRINTER CONTROL LANGUAGE**

Standard	: Adobe® PostScript®3, ESC / Page, ESC / P2™, PCL6, PCL5e, FX, IBM Emulation
----------	--

**DURABILITY**

5 years or 100,000 pages whichever comes first

**OPTIONS**

Document Pack for AcuLaser M2010D / M2010DN	C12C843651
250-Sheet Paper Cassette Unit	C12C802461
Proprietary 90 pins 256MB DIMM RAM	2118755
Proprietary 90 pins 128MB DIMM RAM	2118754
Proprietary 90 pins 64MB DIMM RAM	2118753

**CONSUMABLES**

Developer Cartridge (8K)*1	C13S050439
Developer Cartridge (3.5K)*1	C13S050440

**WARRANTY SERVICE**

1-year on-site warranty service



The warranty service can be extended by purchasing EPSON COVERPLUS Extended Warranty. For more information, please contact EPSON sales enquiry hotline.

**Extended Warranty**

For any warranty details, please visit <http://www2.epson.com.hk/service/en/warranty/ui/>

\*1 Approximate number of sheets under conditions of continuous printing on A4/letter size paper with 5 percent page coverage.  
 \*2 @600 dpi - The duration between the receipt of the Start command(when bit0 of Status238 becomes 1) and the bottom edge of the first page is ejected from the paper output roller  
 \*3 Depends on the following condition.  
 1. Print within 25 sec after power ON. (Considering the 17 sec warmup time, within 8 sec)  
 2. Print within 15 sec after the previous printout.  
 3. Print within 90 sec after printing out 150 sheets.  
 \*4 From power on to the ready status display within 17 seconds. \*1(at 23C, 50% RH, rated voltage, standard memory) The recovery from sleep mode to the ready status display within 14 second. (at 23 C, 50% RH, rated, voltage)  
 ^ Initial Imaging Cartridge K: 2,000 pages (Continuous printing at 5% coverage)



As an international ENERGY STAR Partner, EPSON has determined that this product meets the international ENERGY STAR Program for energy efficiency.

**ESC/P2™** "EPSON ESC/P2 stands for EPSON standard code for printers Level 2. This second generation printer control language supports scalable fonts as well as enhanced graphics capability. It also provides complete backwards compatibility with EPSON's ESC/P, the standard printer language for dot matrix printing."

EPSON is a registered trademark of SEIKO EPSON CORPORATION.  
 EPSON ESC/P2 is a trademark of SEIKO EPSON CORPORATION.  
 PostScript is a trademark of Adobe Systems Incorporated or its subsidiaries and may be registered in certain jurisdictions.  
 All other product names and other company names used herein are for identification purpose only and may be the trademarks or registered trademarks of their respective owners.  
 EPSON disclaims any and all rights for those marks.  
 Specifications are subject to change without notice.

**EPSON**  
EXCEED YOUR VISION

**EPSON HONG KONG LIMITED**  
20/F Harbour Centre, 25 Harbour Road, Wanchai, Hong Kong

**EPSON Service Centre**  
Room 517, Trade Square, 681 Cheung Sha Wan Road, Cheung Sha Wan, Kowloon  
20/F, Harbour Centre, 25 Harbour Road, Wanchai, Hong Kong

**Sales Enquiry Hotline: 2827 8711 Technical Support Hotline: 2827 8911**  
**Website: www.epson.com.hk**